






CUBILOX

C A T A L O G

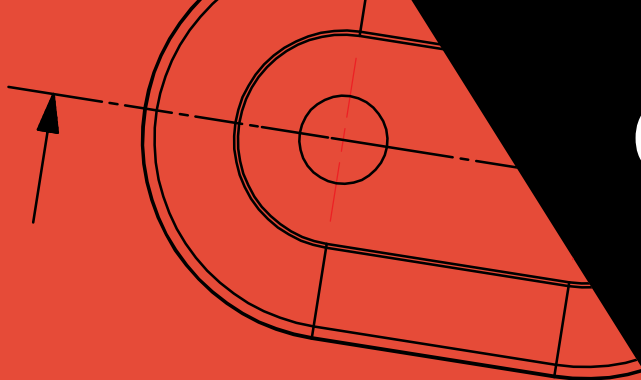

WWW.CUBILOX.BE

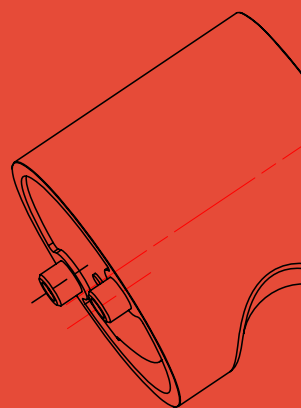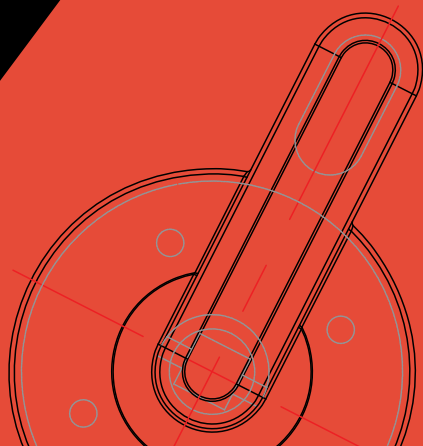

SANITARY FITTINGS CUBILOX

NSE produces fittings and accessories for sanitary partitions, cubicles, changing rooms and lockers, etc., All this under the **CUBILOX** label.

CUBILOX products come in plastic, aluminium as well as stainless steel (currently under development).

All CUBILOX products are developed, manufactured and assembled in-house. When conceiving a CUBILOX product, the aesthetic and functional aspects are always taken into account. The CUBILOX products are made from top-quality materials such as nylon fibreglass, nylon, aluminium 6063T6, stainless steel 304 or 316 with surface finishes to the highest standard.

All products are in stock. Incoming orders are filled daily and can be dispatched the day after your order.

Our competitive prices, impeccable quality and good service are valued greatly by our customers.

We believe that CUBILOX can deliver significant added value for your customers and installations too.

SANITARY PARTITIONS





SHOWERS



CHANGING ROOMS



NYLON

The CUBILOX plastic range is made from a top-quality polyamide material which is resistant to high temperatures, moisture and chemicals. The products have a high-gloss finish and the mould parting lines are barely visible.









The standard range consists of 7 colours:






- RAL 7043 traffic grey B
- RAL 9010 pure white
- RAL 9005 jet black
- RAL 5003 sapphire blue
- RAL 7038 agate grey
- RAL 1021 oilseed rape yellow
- RAL 3003 ruby red






The plastic CUBILOX range comprises door hardware for HPL (high pressure laminate) boards of 10 mm, 13 mm and 18 mm thickness and this for partitions or cubicles with outward- or inward-opening doors, for full inlay doors (a door in line with the front wall) as well as rebated doors.













SERIE: PARTS AND ACCESSORIES IN POLYAMIDE / NYLON

ADJUSTABLE PANEL HOLDER 140 - 170 MM FOR PANEL 13 MM		COLOR	QTY	ART.	DESCRIPTION
		12 sets/bag	5000	REF. 50 - ADJUSTABLE PANEL HOLDER 140-170 MM - 13 MM	
		12 sets/bag	5010	/ adjustable polyamide foot for height under panel between 140mm and 170mm	
		12 sets/bag	5020	/ suitable for a panel thickness of 13mm	
		12 sets/bag	5030	/ also suitable for a panel thickness of 10mm provided a set of intermediate pieces ref. 78 is used	
		12 sets/bag	5040	/ comes with 2 stainless steel self-tapping cross-recessed countersunk head screws Ø 4.8 x 20mm and 2 polyamide cover caps	
		12 sets/bag	5050	/ 1 cover cap is provided with 2 cylindrical sleeves to secure the screws	
		12 sets/bag	5060	/ the screws are invisible after the installation of the second cover cap on the panel holder (click system) / polyamide base with four 7mm holes for attachment to the floor and Ø 71mm polyamide cover cap	


ADJUSTABLE, REINFORCED PANEL HOLDER 90 - 130 MM FOR PANEL 10 MM		COLOR	QTY	ART.	DESCRIPTION
		12 sets/bag	8100	REF. 81 - ADJUSTABLE REINFORCED PANEL HOLDER 90-130 MM - 10 MM	
		12 sets/bag	8110	/ adjustable polyamide foot for height under panel between 90mm and 130mm	
		12 sets/bag	8120	/ suitable for a panel thickness of 10mm	
		12 sets/bag	8140	/ comes with 2 stainless steel self-tapping cross-recessed countersunk head screws Ø 4.8 x 20mm and 2 polyamide cover caps	
				/ 1 cover cap is provided with 2 cylindrical sleeves to secure the screws / the screws are invisible after the installation of the second cover cap on the panel holder (click system) / polyamide base with four 7mm holes for attachment to the floor and Ø 71mm polyamide cover cap	


ADJUSTABLE, REINFORCED PANEL HOLDER 90 - 130 MM FOR PANEL 13 MM		COLOR	QTY	ART.	DESCRIPTION
		12 sets/bag	8300	REF. 83 - ADJUSTABLE REINFORCED PANEL HOLDER 90-130 MM - 13 MM	
		12 sets/bag	8310	/ adjustable polyamide foot for height under panel between 90mm and 130mm	
		12 sets/bag	8320	/ suitable for a panel thickness of 13mm	
		12 sets/bag	8340	/ comes with 2 stainless steel self-tapping cross-recessed countersunk head screws Ø 4.8 x 20mm and 2 polyamide cover caps	
				/ 1 cover cap is provided with 2 cylindrical sleeves to secure the screws / the screws are invisible after the installation of the second cover cap on the panel holder (click system) / polyamide base with four 7mm holes for attachment to the floor and Ø 71mm polyamide cover cap	


ADJUSTABLE, REINFORCED PANEL HOLDER 140 - 170 MM FOR PANEL 13 MM		COLOR	QTY	ART.	DESCRIPTION
		12 sets/bag	8600	REF. 86 - ADJUSTABLE REINFORCED PANEL HOLDER 140-170 MM - 13 MM	
		12 sets/bag	8610	/ adjustable polyamide foot for height under panel between 140mm and 170mm	
		12 sets/bag	8620	/ suitable for a panel thickness of 13mm	
		12 sets/bag	8640	/ also suitable for a panel thickness of 10mm provided a set of intermediate pieces ref. 78 is used	
				/ comes with 2 stainless steel self-tapping cross-recessed countersunk head screws Ø 4.8 x 20mm and 2 polyamide cover caps / 1 cover cap is provided with 2 cylindrical sleeves to secure the screws / the screws are invisible after the installation of the second cover cap on the panel holder (click system) / polyamide base with four 7mm holes for attachment to the floor and Ø 71mm polyamide cover cap	


PANEL HOLDER 100 MM FOR PANEL 18 MM		COLOR	QTY	ART.	DESCRIPTION
		12 sets/bag	8700	REF. 87 - PANEL HOLDER 100 MM - 18 MM	
		12 sets/bag	8710	/ polyamide foot for height under panel 100mm	
		12 sets/bag	8720	/ suitable for a panel thickness of 18mm	
		12 sets/bag	8740	/ comes with 2 stainless steel self-tapping cross-recessed countersunk head screws Ø 4.8 x 20mm and 2 polyamide cover caps	
				/ 1 cover cap is provided with 2 cylindrical sleeves to secure the screws / the screws are invisible after the installation of the second cover cap on the panel holder (click system) / polyamide base with four 7mm holes for attachment to the floor and Ø 71mm polyamide cover cap	


SERIE: PARTS AND ACCESSORIES IN POLYAMIDE / NYLON


DOOR LOCK ADAPTER FOR OVERLAY DOORS 10 MM	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
	■	50	200	6700	REF. 67 - DOOR LOCK ADAPTER FOR OVERLAY DOORS 10 MM / 14mm thick and 50mm Ø polyamide adapter / on 10mm overlay doors is mounted between the rotating part of the lock and the panel
	■	50	200	6710	
	■	50	200	6720	
	■	50	200	6730	
	■	50	200	6740	
	■	50	200	6750	
	■	50	200	6760	


DOOR LOCK ADAPTER FOR OVERLAY DOORS 13 MM	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
	■	50	200	6800	REF. 68 - DOOR LOCK ADAPTER FOR OVERLAY DOORS 13 MM / 17 mm thick and 50mm Ø polyamide adapter / on 13 mm overlay doors is mounted between the rotating part of the lock and the panel
	■	50	200	6810	
	■	50	200	6820	
	■	50	200	6830	
	■	50	200	6840	
	■	50	200	6850	
	■	50	200	6860	


HINGE ADAPTER FOR OVERLAY DOORS 10 MM	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
	■	60	240	6600	REF. 66 - HINGE ADAPTER FOR OVERLAY DOORS 10 MM / 14 mm thick polyamide adapter / on 10 mm overlay doors is mounted between the hinges ref. 56/57/58/59 and fixed panel
	■	60	240	6610	
	■	60	240	6620	
	■	60	240	6630	
	■	60	240	6640	
	■	60	240	6650	
	■	60	240	6660	


HINGE ADAPTER FOR OVERLAY DOORS 13 MM	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
	■	60	240	7700	REF. 77 - HINGE ADAPTER FOR OVERLAY DOORS 13 MM / 17mm thick polyamide adapter / on 13 mm overlay doors is mounted between the hinges ref. 56/57/58/59 and fixed panel
	■	60	240	7710	
	■	60	240	7720	
	■	60	240	7730	
	■	60	240	7740	
	■	60	240	7750	
	■	60	240	7760	

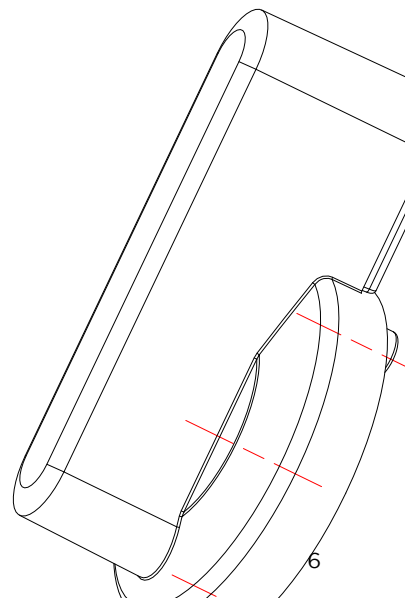










SET OF DOORKNOBS 50 MM	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
	■	20	120	5200	REF. 52 - SET OF DOORKNOBS 50 MM
	■	20	120	5210	/ set of 2 polyamide Ø 50 mm doorknobs
	■	20	120	5220	/ suitable for a panel thicknesses of 10 mm and 13 mm
	■	20	120	5230	/ the doorknobs come with 2 stainless steel self-tapping cross-recessed countersunk head screws Ø 4 x 45mm
	■	20	120	5240	/ the screws are invisible once the polyamide cover caps are fitted to the knobs (click system)
	■	20	120	5250	
	■	20	120	5260	









SET OF DOORKNOBS 40 MM	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
	■	20	120	7500	REF. 75 - SET OF DOORKNOBS 40 MM
	■	20	120	7510	/ set of 2 polyamide Ø 40 mm doorknobs
	■	20	120	7520	/ suitable for a panel thicknesses of 10 mm and 13 mm
	■	20	120	7530	/ the doorknobs come with 2 stainless steel self-tapping cross-recessed countersunk head screws Ø 3.5 x 30 mm
	■	20	120	7540	/ the screws are invisible once the polyamide cover caps are fitted to the knobs (click system)
	■	20	120	7550	
	■	20	120	7560	









DOOR KNOB INSERT	QTY/BOX	ART.	DESCRIPTION
	40	2698	REF. 2698 - INSERT TO REINFORCE THE DOORKNOB Ø 50 MM









DOOR LOCK	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
	■	20	120	5400	REF. 54 - DOOR LOCK WITHOUT ADAPTER
	■	20	120	5410	/ polyamide twist lock with "free" indication in white and "occupied" indication in red
	■	20	120	5420	/ outer diameter 50mm
	■	20	120	5430	/ suitable for doors fitted in-line with a thickness of 10 mm or 13 mm
	■	20	120	5440	/ 360-degree rotational angle with soft stop every 90 degrees
	■	20	120	5450	/ unlocking from the outside using an 8 mm square socket key ref. 1134
	■	20	120	5460	/ supplied with 2 stainless steel cross-recessed countersunk head M4 x 25 mm screws

DOOR LOCK	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
	■	20	120	8400	REF. 84 - DOOR LOCK TO USE WITH ADAPTER 14 MM / 17 MM
	■	20	120	8410	/ polyamide twist lock with "free" indication in white and "occupied" in red
	■	20	120	8420	/ outer diameter 50 mm
	■	20	120	8440	/ suitable for overlay doors with a thickness of 10 mm or 13 mm
	■	20	120	8440	/ use with 14mm lock adapter ref. 67 for 10 mm thick overlay door and with 17 mm lock - adapter ref. 68 for 13 mm thick overlay door
					/ 360-degree rotational angle with soft stop every 90 degrees
					/ unlocking from the outside using an 8mm square socket key ref. 1134
					/ supplied with 2 stainless steel cross-recessed countersunk head M4 x 35 mm screws









STANDARD HINGE R	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
		30	90	5600	REF. 56 - STANDARD RIGHT HINGE
		30	90	5610	/ right hinge in polyamide, inner hinge is reinforced with a galvanized steel plate
		30	90	5620	/ is mounted on the right side of the door
		30	90	5630	/ with grease lubricated stainless steel Ø 12mm inner pin
		30	90	5640	/ 2 countersunk 6 mm mounting holes on each side of the hinge
		30	90	5650	/ the screws (not included) are invisible once the polyamide cover caps have been fitted on the hinges (click system)
		30	90	5660	/ suitable for panels fitted in-line with a thickness of 10mm or 13mm / use with 14mm hinge adapter ref. 66 for 10mm thick overlay door and with 17mm hinge adapter ref. 77 for 13mm thick overlay door / the maximum load capacity is 40 kg per hinge









STANDARD HINGE L	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
		30	90	5700	REF. 57 - STANDARD LEFT HINGE
		30	90	5710	/ left hinge in polyamide, inner hinge is reinforced with a galvanized steel plate
		30	90	5720	/ is mounted on the left side of the door
		30	90	5730	/ with grease lubricated stainless steel Ø 12mm inner pin
		30	90	5740	/ 2 countersunk 6 mm mounting holes on each side of the hinge
		30	90	5750	/ the screws (not included) are invisible once the polyamide cover caps have been fitted on the hinges (click system)
		30	90	5760	/ suitable for panels fitted in-line with a thickness of 10mm or 13mm / use with 14mm hinge adapter ref. 66 for 10mm thick overlay door and with 17mm hinge adapter ref. 77 for 13mm thick overlay door / the maximum load capacity is 40 kg per hinge


SPRING HINGE R	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
		15	90	5800	REF. 58 - RIGHT SPRING HINGE
		15	90	5810	/ right spring hinge in polyamide, inner hinge is reinforced with a galvanized steel plate.
		15	90	5820	/ is mounted on the right side of the door
		15	90	5830	/ with grease lubricated stainless steel Ø 12mm inner pin
		15	90	5840	/ galvanized steel spring in the hollow pin
		15	90	5850	/ the tension of the spring is adjusted to the upper side of the hinge with the help of a flat screw driver and locked to the side of the hinge using a 2.5mm Allen key
		15	90	5860	/ 2 countersunk 6 mm mounting holes on each side of the hinge / the screws (not included) are invisible once the polyamide cover caps have been fitted on the hinges (click system) / suitable for panels fitted in-line with a thickness of 10mm or 13mm / use with 14mm hinge adapter ref. 66 for 10mm thick overlay door and with 17mm hinge adapter ref. 77 for 13mm thick overlay door / the maximum load capacity is 40 kg per hinge


SPRING HINGE L	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
		15	90	5900	REF. 59 - LEFT SPRING HINGE
		15	90	5910	/ left spring hinge in polyamide, inner hinge is reinforced with a galvanized steel plate.
		15	90	5920	/ is mounted on the left side of the door
		15	90	5930	/ with grease lubricated stainless steel Ø 12mm inner pin
		15	90	5940	/ galvanized steel spring in the hollow pin
		15	90	5950	/ the tension of the spring is adjusted to the upper side of the hinge with the help of a flat screw driver and locked to the side of the hinge using a 2.5mm Allen key
		15	90	5960	/ 2 countersunk 6 mm mounting holes on each side of the hinge / the screws (not included) are invisible once the polyamide cover caps have been fitted on the hinges (click system) / suitable for panels fitted in-line with a thickness of 10mm or 13mm / use with 14mm hinge adapter ref. 66 for 10mm thick overlay door and with 17mm hinge adapter ref. 77 for 13mm thick overlay door / the maximum load capacity is 40 kg per hinge


SERIE: PARTS AND ACCESSORIES IN POLYAMIDE / NYLON


SPRING HINGE R	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
		15	90	7100	REF. 71 - SPRING HINGE R - UNLOCKED
		15	90	7110	/ right spring hinge in polyamide, inner hinge is reinforced with a galvanized steel plate.
		15	90	7120	/ is mounted on the right side of the door
		15	90	7130	/ with grease lubricated stainless steel Ø 12mm inner pin
		15	90	7140	/ galvanized steel spring in the hollow pin
		15	90	7150	/ the tension of the spring is adjusted to the upper side of the hinge with the help of a flat screw driver and locked to the side of the hinge using a 2.5mm Allen key
		15	90	7160	/ 2 countersunk 6 mm mounting holes on each side of the hinge / the screws (not included) are invisible once the polyamide cover caps have been fitted on the hinges (click system) / suitable for panels fitted in-line with a thickness of 10mm or 13mm / use with 14mm hinge adapter ref. 66 for 10mm thick overlay door and with 17mm hinge adapter ref. 77 for 13mm thick overlay door / the maximum load capacity is 40 kg per hinge


SPRING HINGE L	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
		15	90	7200	REF. 72 - SPRING HINGE L - UNLOCKED
		15	90	7210	/ left spring hinge in polyamide, inner hinge is reinforced with a galvanized steel plate.
		15	90	7220	/ is mounted on the left side of the door
		15	90	7230	/ with grease lubricated stainless steel Ø 12mm inner pin
		15	90	7240	/ galvanized steel spring in the hollow pin
		15	90	7250	/ the tension of the spring is adjusted to the upper side of the hinge with the help of a flat screw driver and locked to the side of the hinge using a 2.5mm Allen key
		15	90	7260	/ 2 countersunk 6 mm mounting holes on each side of the hinge / the screws (not included) are invisible once the polyamide cover caps have been fitted on the hinges (click system) / suitable for panels fitted in-line with a thickness of 10mm or 13mm / use with 14mm hinge adapter ref. 66 for 10mm thick overlay door and with 17mm hinge adapter ref. 77 for 13mm thick overlay door / the maximum load capacity is 40 kg per hinge

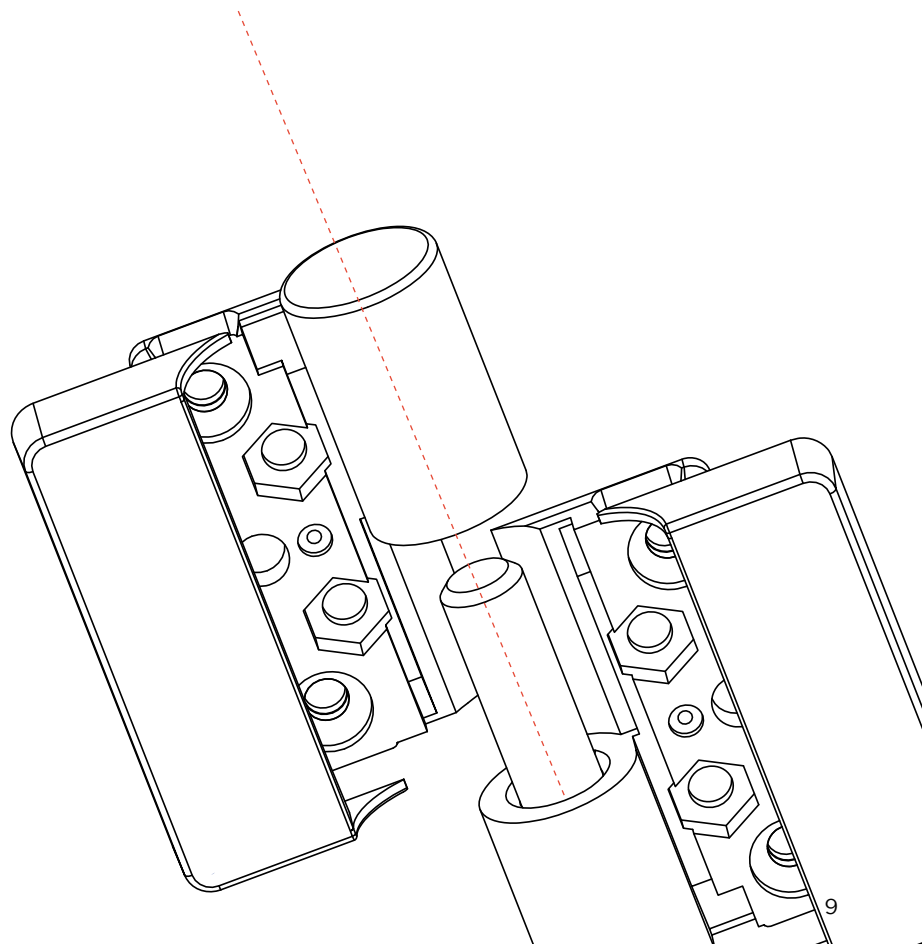


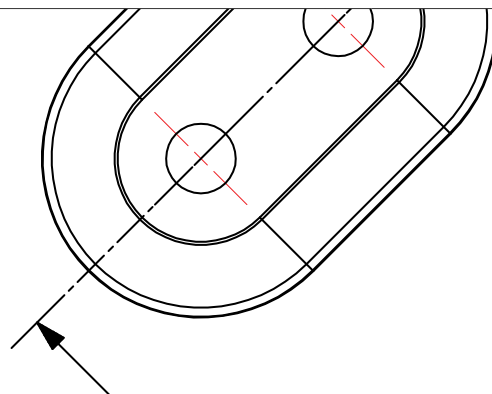
ANGLE FIXTURE	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
	■	50	200	6200	REF. 62 - ANGLE FIXTURE
	■	50	200	6210	/ polyamide corner piece for the attachment of the side partition to the wall
	■	50	200	6220	/ 2 countersunk Ø 5 mm holes
	■	50	200	6230	/ the screws (not included) are invisible once the polyamide cover caps have been fitted on the corner pieces (click system)
	■	50	200	6240	
	■	50	200	6250	
	■	50	200	6260	

PANEL CLAMP TUBE FOR PANEL 13 MM	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
	■	20	120	6300	REF. 63 - 34 MM PANEL CLAMP TUBE FOR 13 MM PANEL
	■	20	120	6310	/ polyamide panel clamp to mount 13 mm panels to Ø 34 mm tubes
	■	20	120	6320	/ comes with 2 stainless steel self-tapping cross-recessed countersunk head screws Ø 4.8 x 20mm and 2 polyamide cover caps
	■	20	120	6330	/ 1 cover cap is provided with one cylindrical sleeve to secure the screw
	■	20	120	6340	/ the screw is invisible after the installation of the second cover cap on the panel clamp (click system)
	■	20	120	6350	
	■	20	120	6360	

























PANEL-TO-WALL CLAMP	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
	■	25	100	6400	REF. 64 - 13 MM PANEL-TO-WALL CLAMP
	■	25	100	6410	/ polyamide panel clamp to mount 13mm panels to the wall
	■	25	100	6420	/ 1 countersunk Ø 5mm hole to mount the panel clamp to the wall
	■	25	100	6430	/ comes with 2 stainless steel self-tapping cross-recessed countersunk head screws Ø 4.8 x 20mm and 2 polyamide cover caps
	■	25	100	6440	/ 1 cover cap is provided with one cylindrical sleeve to secure the screw
	■	25	100	6450	/ the screw is invisible after the installation of the second cover cap on the panel clamp (click system)
	■	25	100	6460	


INTERMEDIATE PIECE	COLOR	QTY/BOX	ART.	DESCRIPTION
	■	12 sets/bag	7800	REF. 78 - 2 X 1.5 MM PANEL HOLDER INTERMEDIATE PIECES FOR 10 MM PANELS
	■	12 sets/bag	7810	/ set of 2 polyamide intermediate pieces, each 1,5mm thick
	■	12 sets/bag	7820	/ is used with 13mm panel holder ref. 50 for 10mm thick panels
	■	12 sets/bag	7830	/ the intermediate pieces are inserted between the panel holder and the panel and maintained in position by the cover cap of the panel holder
	■	12 sets/bag	7840	
	■	12 sets/bag	7850	
	■	12 sets/bag	7860	



INTERMEDIATE PIECE	COLOR	QTY/BOX	ART.	DESCRIPTION
	■	20 sets/bag	7900	REF. 79 - 2 X 1.5 MM PANEL CLAMP INTERMEDIATE PIECES FOR 10 MM PANELS
	■	20 sets/bag	7910	/ set of 2 polyamide intermediate pieces, each 1.5 mm thick
	■	20 sets/bag	7920	/ is used with panel clamps ref. 63 and 64 for 10mm thick panels
	■	20 sets/bag	7930	/ the intermediate pieces are inserted between the panel clamp and the panel and maintained in position by the cover cap of the panel clamp
	■	20 sets/bag	7940	
	■	20 sets/bag	7950	
	■	20 sets/bag	7960	



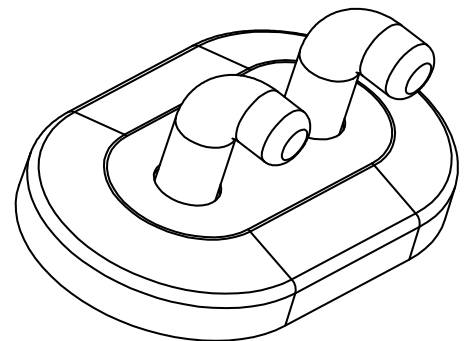


SERIE: PARTS AND ACCESSORIES IN POLYAMIDE / NYLON

SINGLE CLOTHES HOOK	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
		50	200	6000	REF. 60 - SINGLE CLOTHES HOOK / polyamide single clothes hook / base with 2 countersunk Ø 4.5 mm holes / the screws (not included) are invisible once the polyamide cover cap has been fitted on the clothes hook (click system)
		50	200	6010	
		50	200	6020	
		50	200	6030	
		50	200	6040	
		50	200	6050	
		50	200	6060	
DOUBLE CLOTHES HOOK	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
		25	100	6100	REF. 61 - DOUBLE CLOTHES HOOK / polyamide double clothes hook / base with 2 countersunk Ø 4.5 mm holes / the screws (not included) are invisible once the polyamide cover cap has been fitted on the clothes hook (click system)
		25	100	6110	
		25	100	6120	
		25	100	6130	
		25	100	6140	
		25	100	6150	
		25	100	6160	
TOILET ROLL HOLDER	COLOR	QTY/BOX	QTY/CARTON	ART.	DESCRIPTION
		10	40	6500	REF. 65 - TOILET ROLL HOLDER / polyamide toilet roll holder with hinged holder / base with 2 countersunk Ø 5mm holes / the screws (not included) are invisible once the polyamide cover cap has been fitted on the clothes hook (click system)
		10	40	6510	
		10	40	6520	
		10	40	6530	
		10	40	6540	
		10	40	6550	
		10	40	6560	



 RAL 7043 - TRAFFIC GREY B
 RAL 7038 - AGATE GREY

 RAL 9010 - PURE WHITE
 RAL 1021 - OILSEED RAPE YELLOW

 RAL 9005 - JET BLACK
 RAL 3003 - RUBY RED

 RAL 5003 - SAPPHIRE BLUE

ALUMINIUM SILVER LINE

The CUBILOX aluminium range is made of high-grade 6063-T6 aluminium, machined with pinpoint precision and always coated with a top-quality, anodized finish.






The aluminium CUBILOX range comprises all the metalwork for various panel thicknesses 10 mm, 13 mm, 30 mm, and this for partitions with outward- or inward-opening doors, for full inlay doors (a door in line with the front wall) as well as rebated doors.


Cubicles fitted previously with plastic door hardware can be converted to aluminium without additional drilling.



SERIE: PARTS AND ACCESSORIES IN ALUMINIUM SILVERLINE





- ONLY USE IN DRY ENVIRONMENTS -


ADJUSTABLE PANEL HOLDER 90-130MM-10MM	QTY/CARTON	QTE/ BOX	DESCRIPTION
	12	72	REF. 2678 - ADJUSTABLE PANEL HOLDER 90-130MM - 10 MM / adjustable anodized aluminium foot for height under panel between 90 mm and 130 mm / suitable for a panel thickness of 10 mm / rod diameter 18 mm / base in galvanized steel with six 7mm holes for mounting to the floor and with M10 threaded rod for height adjustment / underneath the base, a polyamide panel (click system) to avoid contact between the metal and the floor / the height of the panel holder is adjusted using a 17mm flat key / a 17 mm counter-nut ensures the stability of the panel holder / a double cover cap in anodized aluminum with a 71mm outer diameter at the base (click system) ensures easy access to the screws / 2 countersunk Ø 5 mm holes in the panel holder to secure the panel
ADJUSTABLE PANEL HOLDER 140-170MM-13MM	QTY/CARTON	QTY/BOX	DESCRIPTION
	12	72	REF. 2009 - ADJUSTABLE PANEL HOLDER 140 - 170 MM - 13 MM / adjustable anodized aluminium foot for height under panel between 140 mm and 170mm / suitable for a panel thickness of 10 mm / rod diameter 18 mm / base in galvanized steel with six 7 mm holes for mounting to the floor and with M10 threaded rod for height adjustment / underneath the base, a polyamide panel (click system) to avoid contact between the metal and the floor / the height of the panel holder is adjusted using a 17 mm flat key / a 17 mm counter-nut ensures the stability of the panel holder / a double cover cap in anodized aluminum with a 71 mm outer diameter at the base (click system) ensures easy access to the screws / 2 countersunk Ø 5 mm holes in the panel holder to secure the panel
ADJUSTABLE, REINFORCED PANEL HOLDER 90-130MM - 10MM	QTY/CARTON	QTY/BOX	DESCRIPTION
	12	72	REF. 3107 - ADJUSTABLE REINFORCED PANEL HOLDER 90 - 130 MM - 10 MM / adjustable anodized aluminium foot for height under panel between 90 mm and 130 mm / suitable for a panel thickness of 10 mm / rod diameter 18 mm / base in stainless steel with six 7mm holes for mounting to the floor and with M10 threaded rod for height adjustment / underneath the base, a polyamide panel (click system) to avoid contact between the metal and the floor / the height of the panel holder is adjusted using a 17mm flat key / a 17 mm counter-nut ensures the stability of the panel holder / a double cover cap in anodized aluminum with a 71mm outer diameter at the base (click system) ensures easy access to the screws / 2 countersunk Ø 5 mm holes in the panel holder to secure the panel
ADJUSTABLE, REINFORCED PANEL HOLDER 90-130MM - 13MM	QTY/CARTON	QTY/BOX	DESCRIPTION
	12	72	REF. 3510 - ADJUSTABLE REINFORCED PANEL HOLDER 90 - 130 MM - 13 MM / adjustable anodized aluminium foot for height under panel between 90 mm and 130 mm / suitable for a panel thickness of 13 mm / rod diameter 18 mm / base in stainless steel with six 7mm holes for mounting to the floor and with M10 threaded rod for height adjustment / underneath the base, a polyamide panel (click system) to avoid contact between the metal and the floor / the height of the panel holder is adjusted using a 17mm flat key / a 17 mm counter-nut ensures the stability of the panel holder / a double cover cap in anodized aluminum with a 71mm outer diameter at the base (click system) ensures easy access to the screws / 2 countersunk Ø 5 mm holes in the panel holder to secure the panel
ADJUSTABLE, REINFORCED PANEL HOLDER 140-170MM - 13 MM	QTY/CARTON	QTY/BOX	DESCRIPTION
	12	72	REF. 3108 - ADJUSTABLE REINFORCED PANEL HOLDER 140- 170 MM - 13 MM / adjustable anodized aluminium foot for height under panel between 140 mm and 170mm / suitable for a panel thickness of 10 mm / rod diameter 18 mm / base in stainless steel with six 7 mm holes for mounting to the floor and with M10 threaded rod for height adjustment / underneath the base, a polyamide panel (click system) to avoid contact between the metal and the floor / the height of the panel holder is adjusted using a 17 mm flat key / a 17 mm counter-nut ensures the stability of the panel holder / a double cover cap in anodized aluminum with a 71 mm outer diameter at the base (click system) ensures easy access to the screws / 2 countersunk Ø 5 mm holes in the panel holder to secure the panel


SET OF TWO DOORKNOBS 30 MM	QTY/CARTON	QTY/BOX	DESCRIPTION
	20	120	REF. 2257 - SET OF TWO DOORKNOBS 30 MM / set of two Ø 30 mm doorknobs in anodized aluminium / suitable for a panel thicknesses of 10 mm and 13 mm / one knob is provided with a stainless steel M8 threaded rod / the other door knob has an inner thread of M8 and is locked laterally using a 3 mm Allen key
DOOR LOCK WITH KNOB 13 MM	QTY/CARTON	QTY/BOX	DESCRIPTION
	20	120	REF. 2120 - DOOR LOCK WITH INTEGRATED KNOB 13 MM / anodized aluminium twist lock with "free" indication in white and "occupied" indication in red / door lock shape specially adapted to also serve as a doorknob / 57mm outer diameter / suitable for doors fitted in-line with a thickness of 10 mm or 13 mm / 360-degree rotational angle with soft stop every 90 degrees / can be unlocked from the outside using an 8mm square socket key ref. 1134 / supplied with 2 stainless steel cross-recessed countersunk head M4 x 60 mm screws
DOORLOCK STANDARD 13 MM	QTY/CARTON	QTY/BOX	DESCRIPTION
	10	60	REF. 2607 - DOOR LOCK STANDARD 13MM / anodized aluminium twist lock with "free" indication in white and "occupied" indication in red / 57mm outer diameter / suitable for doors fitted in-line with a thickness of 10 mm or 13 mm / 360-degree rotational angle with soft stop every 90 degrees / can be unlocked from the outside using an 8mm square socket key ref. 1134 / supplied with 2 stainless steel cross-recessed countersunk head M4 x 30mm screws
DOORLOCK STANDARD 13 MM + 17MM	QTY/CARTON	QTY/BOX	DESCRIPTION
	10	60	REF. 3005 - DOOR LOCK STANDARD 13MM + 17MM / anodized aluminium twist lock with "free" indication in white and "occupied" indication in red / 57mm outer diameter / suitable for overlay doors with a thickness of 13 mm because of the integrated adapter of 17 mm / 360-degree rotational angle with soft stop every 90 degrees / can be unlocked from the outside using an 8mm square socket key ref. 1134 / supplied with 2 stainless steel cross-recessed countersunk head M4 x 50mm screws
DOORLOCK STANDARD 10 MM	QTY/CARTON	QTY/BOX	DESCRIPTION
	10	60	REF. 3003 - DOOR LOCK STANDARD 10 MM / anodized aluminium twist lock with "free" indication in white and "occupied" indication in red / 57 mm outer diameter / suitable for doors fitted in-line with a thickness of 10 mm / 360-degree rotational angle with soft stop every 90 degrees / can be unlocked from the outside using an 8mm square socket key ref. 1134 / supplied with 2 stainless steel cross-recessed countersunk head M4 x 30 mm screws
DOORLOCK STANDARD 10 MM + 14 MM	QTY/CARTON	QTY/BOX	DESCRIPTION
	10	60	REF. 3004 - DOOR LOCK STANDARD 10 MM + 14 MM / anodized aluminium twist lock with "free" indication in white and "occupied" indication in red / 57 mm outer diameter / suitable for overlay doors with a thickness of 10mm because of the integrated adapter of 14 mm / 360-degree rotational angle with soft stop every 90 degrees / can be unlocked from the outside using an 8mm square socket key ref. 1134 / supplied with 2 stainless steel cross-recessed countersunk head M4 x 45 mm screws


SERIE: PARTS AND ACCESSORIES IN ALUMINIUM SILVERLINE


- ONLY USE IN DRY ENVIRONMENTS -


ECO HINGE R	QTY/CARTON	QTY/BOX	DESCRIPTION
	30	90	REF. 2111 - RIGHT ECO HINGE / right hinge in anodized aluminium / is mounted on the right side of the door / with grease lubricated stainless steel Ø 12 mm inner pin / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm / the maximum load capacity is 40 kg per hinge
ECO HINGE L	QTY/CARTON	QTY/BOX	DESCRIPTION
	30	90	REF. 1909 - LEFT ECO HINGE / left hinge in anodized aluminium / is mounted on the left side of the door / with grease lubricated stainless steel Ø 12mm inner pin / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / suitable for panels fitted in-line with a thickness of 10mm or 13mm / the maximum load capacity is 40 kg per hinge
ECO SPRING HINGE R	QTY/CARTON	QTY/BOX	DESCRIPTION
	15	90	REF. 2112 - RIGHT ECO SPRING HINGE / right spring hinge in anodized aluminium / is mounted on the right side of the door / with grease lubricated hollow brass Ø 12mm inner pin / stainless steel spring in the hollow pin / the tension of the spring is adjusted to the upper side of the hinge with the help of a 6 mm Allen key and locked to the side of the hinge using a 2.5 mm Allen key / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm / the maximum load capacity is 40 kg per hinge
ECO SPRING HINGE L	QTY/CARTON	QTY/BOX	DESCRIPTION
	15	90	REF. 1910 - LEFT ECO SPRING HINGE / left spring hinge in anodized aluminium / is mounted on the left side of the door / with grease lubricated hollow brass Ø 12 mm inner pin / stainless steel spring in the hollow pin / the tension of the spring is adjusted to the upper side of the hinge with the help of a 6 mm Allen key and locked to the side of the hinge using a 2.5 mm Allen key / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm / the maximum load capacity is 40 kg per hinge

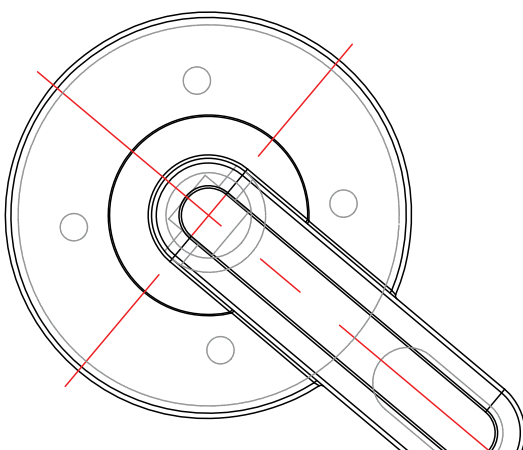


STANDARD HINGE R	QTY/CARTON	QTY/BOX	DESCRIPTION
	30	90	REF. 2113 - RIGHT STANDARD HINGE / right hinge in anodized aluminium / is mounted on the right side of the door / with grease lubricated stainless steel Ø 12 mm inner pin / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5mm mounting holes on each side of the hinge / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm / use with 14 mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge

STANDARD HINGE L	QTY/CARTON	QTY/BOX	DESCRIPTION
	30	90	REF. 1911 - LEFT STANDARD HINGE / left hinge in anodized aluminium / is mounted on the left side of the door / with grease lubricated stainless steel Ø 12 mm inner pin / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / suitable for panels fitted in-line with a thickness of 10mm or 13 mm / use with 14 mm hinge adapter ref. 2681 for 10mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge



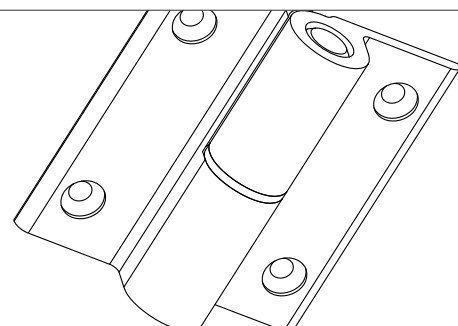

STANDARD SPRING HINGE R	QTY/CARTON	QTY/BOX	DESCRIPTION
	15	90	REF. 2114 - RIGHT STANDARD SPRING HINGE / right spring hinge in anodized aluminium / is mounted on the right side of the door / with grease lubricated hollow brass Ø 12 mm inner pin / stainless steel spring in the hollow pin / the tension of the spring is adjusted to the upper side of the hinge with the help of a 6 mm Allen key and locked to the side of the hinge using a 2.5 mm Allen key / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm / use with 14mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge


STANDARD SPRING HINGE L	QTY/CARTON	QTY/BOX	DESCRIPTION
	15	90	REF. 1912 - LEFT STANDARD SPRING HINGE / left spring hinge in anodized aluminium / is mounted on the left side of the door / with grease lubricated hollow brass Ø 12 mm inner pin / stainless steel spring in the hollow pin / the tension of the spring is adjusted to the upper side of the hinge with the help of a 6 mm Allen key and locked to the side of the hinge using a 2.5 mm Allen key / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm / use with 14mm hinge adapter ref. 2681 for 10mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge



SERIE: PARTS AND ACCESSORIES IN ALUMINIUM SILVERLINE

- ONLY USE IN DRY ENVIRONMENTS -



RIGHT HINGE + COVER CAPS	QTY/CARTON	QTY/BOX	DESCRIPTION
	30	90	REF. 2115 - RIGHT HINGE WITH COVER CAPS / right hinge in anodized aluminium / is mounted on the right side of the door / with grease lubricated stainless steel Ø 12mm inner pin / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / the screws (not included) are invisible once the cover caps in anodized aluminum have been fitted onto the hinges using a 1.5 mm Allen key / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm / use with 14 mm hinge adapter ref. 2681 for 10mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13mm thick overlay door / the maximum load capacity is 40 kg per hinge
LEFT HINGE + COVER CAPS	QTY/CARTON	QTY/BOX	DESCRIPTION
	30	90	REF. 1913 - LEFT HINGE WITH COVER CAPS / left hinge in anodized aluminium / is mounted on the left side of the door / with grease lubricated stainless steel Ø 12 mm inner pin / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / the screws (not included) are invisible once the cover caps in anodized aluminum have been fitted onto the hinges using a 1.5 mm Allen key / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm / use with 14 mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge
RIGHT SPRING HINGE + COVER CAPS	QTY/CARTON	QTY/BOX	DESCRIPTION
	15	90	REF. 2116 - RIGHT SPRING HINGE WITH COVER CAPS / right spring hinge in anodized aluminium / is mounted on the right side of the door / with grease lubricated hollow brass Ø 12 mm inner pin / stainless steel spring in the hollow pin / the tension of the spring is adjusted to the upper side of the hinge with the help of a 6 mm Allen key and locked to the side of the hinge using a 2.5 mm Allen key / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / the screws (not included) are invisible once the cover caps in anodized aluminum have been fitted onto the hinges using a 1.5 mm Allen key / suitable for panels fitted in-line with a thickness of 1 mm or 13 mm / use with 14 mm hinge adapter ref. 2681 for 10mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge
LEFT SPRING HINGE + COVER CAPS	QTY/CARTON	QTY/BOX	DESCRIPTION
	15	90	REF. 1914 - LEFT SPRING HINGE WITH COVER CAPS / left spring hinge in anodized aluminium / is mounted on the left side of the door / with grease lubricated hollow brass Ø 12 mm inner pin / stainless steel spring in the hollow pin / the tension of the spring is adjusted to the upper side of the hinge with the help of a 6 mm Allen key and locked to the side of the hinge using a 2.5 mm Allen key / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / the screws (not included) are invisible once the cover caps in anodized aluminum have been fitted onto the hinges using a 1.5 mm Allen key / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm / use with 14 mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge




HINGE ADAPTER FOR 10 MM OVERLAY DOORS	QTY/CARTON	QTY/BOX	DESCRIPTION
	30	120	REF. 2681 - 14 MM HINGE ADAPTER / 14 mm thick adapter in anodized aluminium / on 10 mm overlay doors is mounted between the hinges ref. 2113/1911/2114/1912/2115/1913/2116/1914 and the fixed panel
HINGE ADAPTER FOR 13 MM OVERLAY DOORS	QTY/CARTON	QTY/BOX	DESCRIPTION
	30	120	REF. 2695 - 17 MM HINGE ADAPTER / 14 mm thick adapter in anodized aluminium / on 10 mm overlay doors is mounted between the hinges ref. 2113/1911/2114/1912/2115/1913/2116/1914 and the fixed panel
CLOTHES HOOK	QTY/CARTON	QTY/BOX	DESCRIPTION
	50	200	REF. 2258 - CLOTHES HOOK / single clothes hook in anodized aluminium / 2 countersunk Ø 5mm holes
PANEL-TO-WALL CLAMP 10 MM	QTY/CARTON	QTY/BOX	DESCRIPTION
	25	100	REF. 4815 PANEL-TO-WALL CLAMP 10 MM / in anodized aluminium / 1 countersunk Ø 5,5 mm hole for attachment to the panel / 1 countersunk Ø 4 mm hole to mount the panel clamp to the wall
PANEL-TO-WALL CLAMP 13 MM	QTY/CARTON	QTY/BOX	DESCRIPTION
	25	100	REF. 4816 PANEL-TO-WALL CLAMP 13 MM / in anodized aluminium / 1 countersunk Ø 5,5 mm hole for attachment to the panel / 1 countersunk Ø 4 mm hole to mount the panel clamp to the wall
PANEL CLAMP TUBE FOR PANEL 13 MM	QUANTITÉ/CARTON		DESCRIPTION
	50		REF. 2747 - PANEL CLAMP TUBE FOR PANEL 13 MM / in anodized aluminium / for a panel of 13 mm / for a tube of Ø 35 mm

SERIE: PARTS AND ACCESSORIES IN ALUMINIUM SILVERLINE

- ONLY USE IN DRY ENVIRONMENTS -

ANGLE FIXTURE WITH TWO COUNTERSUNK HOLES	QTY/BOX	DESCRIPTION	
	60	REF. 2430 - ANGLE FIXTURE WITH TWO COUNTERSUNK HOLES / in anodized aluminium for the attachment of the side partition to the wall / two countersunk holes Ø 6 mm	
ANGLE FIXTURE WITH ONE COUNTERSUNK HOLE AND 1 SLOT HOLE	QTY/BOX	DESCRIPTION	
	60	REF. 3178 - ANGLE FIXTURE WITH ONE COUNTERSUNK HOLE AND 1 SLOT HOLE / in anodized aluminium for the attachment of the side partition to the wall / 1 countersunk hole Ø 6 mm / 1 slot hole	



ALUMINIUM BLACK LINE

The CUBILOX aluminium range is made of high-grade 6063-T6 aluminium, machined with pinpoint precision and always coated with a top-quality, anodized finish.

The aluminium CUBILOX range comprises all the metalwork for various panel thicknesses 10 mm, 13 mm, 30 mm, and this for partitions with outward- or inward-opening doors, for full inlay doors (a door in line with the front wall) as well as rebated doors.

Cubicles fitted previously with plastic door hardware can be converted to aluminium without additional drilling.

SERIE: PARTS AND ACCESSORIES IN ALUMINIUM BLACKLINE

- ONLY USE IN DRY ENVIRONMENTS -


ADJUSTABLE PANEL HOLDER 90-130 MM-10MM	QTÉ/ CARTON	QTÉ/ BOX	DESCRIPTION
	12	72	REF. 12000 - ADJUSTABLE PANEL HOLDER 90-130MM - 10 MM / adjustable anodized aluminium foot for height under panel between 90 mm and 130 mm / suitable for a panel thickness of 10 mm / rod diameter 18 mm / base in galvanized steel with six 7mm holes for mounting to the floor and with M10 threaded rod for height adjustment / underneath the base, a polyamide panel (click system) to avoid contact between the metal and the floor / the height of the panel holder is adjusted using a 17mm flat key / a 17 mm counter-nut ensures the stability of the panel holder / a double cover cap in anodized aluminum with a 71mm outer diameter at the base (click system) ensures easy access to the screws / 2 countersunk Ø 5 mm holes in the panel holder to secure the panel
ADJUSTABLE PANEL HOLDER 140-170MM-13MM	QTÉ/ CARTON	QTÉ/ BOX	DESCRIPTION
	12	72	REF. 12001 - ADJUSTABLE PANEL HOLDER 140 - 170 MM - 13 MM / adjustable anodized aluminium foot for height under panel between 140 mm and 170mm / suitable for a panel thickness of 10 mm / rod diameter 18 mm / base in galvanized steel with six 7 mm holes for mounting to the floor and with M10 threaded rod for height adjustment / underneath the base, a polyamide panel (click system) to avoid contact between the metal and the floor / the height of the panel holder is adjusted using a 17 mm flat key / a 17 mm counter-nut ensures the stability of the panel holder / a double cover cap in anodized aluminum with a 71 mm outer diameter at the base (click system) ensures easy access to the screws / 2 countersunk Ø 5 mm holes in the panel holder to secure the panel
ADJUSTABLE, REINFORCED PANEL HOLDER 90-130MM - 10MM	QTÉ/ CARTON	QTÉ/ BOX	DESCRIPTION
	12	72	REF. 12002 - ADJUSTABLE REINFORCED PANEL HOLDER 90 - 130 MM - 10 MM / adjustable anodized aluminium foot for height under panel between 90 mm and 130 mm / suitable for a panel thickness of 10 mm / rod diameter 18 mm / base in stainless steel with six 7mm holes for mounting to the floor and with M10 threaded rod for height adjustment / underneath the base, a polyamide panel (click system) to avoid contact between the metal and the floor / the height of the panel holder is adjusted using a 17mm flat key / a 17 mm counter-nut ensures the stability of the panel holder / a double cover cap in anodized aluminum with a 71mm outer diameter at the base (click system) ensures easy access to the screws / 2 countersunk Ø 5 mm holes in the panel holder to secure the panel
ADJUSTABLE, REINFORCED PANEL HOLDER 90-130MM - 13MM	QTÉ/ CARTON	QTÉ/ BOX	DESCRIPTION
	12	72	REF. 12003 - ADJUSTABLE REINFORCED PANEL HOLDER 90 - 130 MM - 13 MM / adjustable anodized aluminium foot for height under panel between 90 mm and 130 mm / suitable for a panel thickness of 13 mm / rod diameter 18 mm / base in stainless steel with six 7mm holes for mounting to the floor and with M10 threaded rod for height adjustment / underneath the base, a polyamide panel (click system) to avoid contact between the metal and the floor / the height of the panel holder is adjusted using a 17mm flat key / a 17 mm counter-nut ensures the stability of the panel holder / a double cover cap in anodized aluminum with a 71mm outer diameter at the base (click system) ensures easy access to the screws / 2 countersunk Ø 5 mm holes in the panel holder to secure the panel
ADJUSTABLE, REINFORCED PANEL HOLDER 140-170MM - 13 MM	QTÉ/ CARTON	QTÉ/ BOX	DESCRIPTION
	12	72	REF. 12004 - ADJUSTABLE REINFORCED PANEL HOLDER 140- 170 MM - 13 MM / adjustable anodized aluminium foot for height under panel between 140 mm and 170mm / suitable for a panel thickness of 10 mm / rod diameter 18 mm / base in stainless steel with six 7 mm holes for mounting to the floor and with M10 threaded rod for height adjustment / underneath the base, a polyamide panel (click system) to avoid contact between the metal and the floor / the height of the panel holder is adjusted using a 17 mm flat key / a 17 mm counter-nut ensures the stability of the panel holder / a double cover cap in anodized aluminum with a 71 mm outer diameter at the base (click system) ensures easy access to the screws / 2 countersunk Ø 5 mm holes in the panel holder to secure the panel

SET OF TWO DOORKNOBS 30 MM	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION
	20	120	REF. 12005 - SET OF TWO DOORKNOBS 30 MM / set of two Ø 30 mm doorknobs in black anodized aluminium / suitable for a panel thicknesses of 10 mm and 13 mm / one knob is provided with a stainless steel M8 threaded rod / the other door knob has an inner thread of M8 and is locked laterally using a 3 mm Allen key
DOOR LOCK WITH KNOB 13 MM	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION
	20	120	REF. 12006 - DOOR LOCK WITH INTEGRATED KNOB 13 MM / black anodized aluminium twist lock with "free" indication in white and "occupied" indication in red / door lock shape specially adapted to also serve as a doorknob / 57mm outer diameter / suitable for doors fitted in-line with a thickness of 10 mm or 13 mm / 360-degree rotational angle with soft stop every 90 degrees / can be unlocked from the outside using an 8mm square socket key ref. 1134 / supplied with 2 stainless steel cross-recessed countersunk head M4 x 60 mm screws
DOORLOCK STANDARD 13 MM	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION
	10	120	REF. 12007 - DOOR LOCK STANDARD 13MM / black anodized aluminium twist lock with "free" indication in white and "occupied" indication in red / 57mm outer diameter / suitable for doors fitted in-line with a thickness of 10 mm or 13 mm / 360-degree rotational angle with soft stop every 90 degrees / can be unlocked from the outside using an 8mm square socket key ref. 1134 / supplied with 2 stainless steel cross-recessed countersunk head M4 x 30mm screws
DOORLOCK STANDARD 13 MM + 17MM	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION
	10	120	REF. 12008 - DOOR LOCK STANDARD 13MM + 17MM / black anodized aluminium twist lock with "free" indication in white and "occupied" indication in red / 57mm outer diameter / suitable for overlay doors with a thickness of 13 mm because of the integrated adapter of 17 mm / 360-degree rotational angle with soft stop every 90 degrees / can be unlocked from the outside using an 8mm square socket key ref. 1134 / supplied with 2 stainless steel cross-recessed countersunk head M4 x 50mm screws
DOORLOCK STANDARD 10 MM	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION
	10	120	REF. 12009 - DOOR LOCK STANDARD 10 MM / black anodized aluminium twist lock with "free" indication in white and "occupied" indication in red / 57 mm outer diameter / suitable for doors fitted in-line with a thickness of 10 mm / 360-degree rotational angle with soft stop every 90 degrees / can be unlocked from the outside using an 8mm square socket key ref. 1134 / supplied with 2 stainless steel cross-recessed countersunk head M4 x 30 mm screws
DOORLOCK STANDARD 10 MM + 14 MM	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION
	10	120	REF. 12010 - DOOR LOCK STANDARD 10 MM + 14 MM / black anodized aluminium twist lock with "free" indication in white and "occupied" indication in red / 57 mm outer diameter / suitable for overlay doors with a thickness of 10mm because of the integrated adapter of 14 mm / 360-degree rotational angle with soft stop every 90 degrees / can be unlocked from the outside using an 8mm square socket key ref. 1134 / supplied with 2 stainless steel cross-recessed countersunk head M4 x 45 mm screws


SERIE: PARTS AND ACCESSORIES IN ALUMINIUM BLACKLINE

- ONLY USE IN DRY ENVIRONMENTS -

RIGHT HINGE + COVER CAPS	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION
	30	90	REF. 12011 - RIGHT HINGE WITH COVER CAPS / right hinge in anodized aluminium / is mounted on the right side of the door / with grease lubricated stainless steel Ø 12mm inner pin / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / the screws (not included) are invisible once the cover caps in anodized aluminum have been fitted onto the hinges using a 1.5 mm Allen key / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm / use with 14 mm hinge adapter ref. 2681 for 10mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13mm thick overlay door / the maximum load capacity is 40 kg per hinge
LEFT HINGE + COVER CAPS	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION
	30	90	REF. 12012 - LEFT HINGE WITH COVER CAPS / left hinge in anodized aluminium / is mounted on the left side of the door / with grease lubricated stainless steel Ø 12 mm inner pin / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / the screws (not included) are invisible once the cover caps in anodized aluminum have been fitted onto the hinges using a 1.5 mm Allen key / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm / use with 14 mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge
RIGHT SPRING HINGE + COVER CAPS	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION
	15	90	REF. 12013 - RIGHT SPRING HINGE WITH COVER CAPS / right spring hinge in anodized aluminium / is mounted on the right side of the door / with grease lubricated hollow brass Ø 12 mm inner pin / stainless steel spring in the hollow pin / the tension of the spring is adjusted to the upper side of the hinge with the help of a 6 mm Allen key and locked to the side of the hinge using a 2.5 mm Allen key / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / the screws (not included) are invisible once the cover caps in anodized aluminum have been fitted onto the hinges using a 1.5 mm Allen key / suitable for panels fitted in-line with a thickness of 1 mm or 13 mm / use with 14 mm hinge adapter ref. 2681 for 10mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge
LEFT SPRING HINGE + COVER CAPS	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION
	15	90	REF. 12014 - LEFT SPRING HINGE WITH COVER CAPS / left spring hinge in anodized aluminium / is mounted on the left side of the door / with grease lubricated hollow brass Ø 12 mm inner pin / stainless steel spring in the hollow pin / the tension of the spring is adjusted to the upper side of the hinge with the help of a 6 mm Allen key and locked to the side of the hinge using a 2.5 mm Allen key / a nylon sleeve is mounted over the pin between the two hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / the screws (not included) are invisible once the cover caps in anodized aluminum have been fitted onto the hinges using a 1.5 mm Allen key / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm / use with 14 mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge



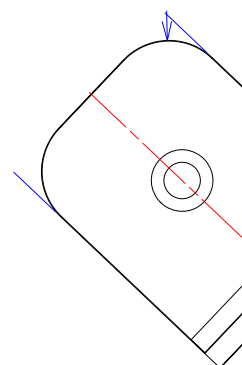


HINGE ADAPTER FOR 10 MM OVERLAY DOORS	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION	
	30	120	REF. 12015 - 14 MM HINGE ADAPTER / 14 mm thick adapter in anodized aluminium / on 10 mm overlay doors is mounted between the hinges ref. 2113/1911/2114/1912/2115/1913/2116/1914 and the fixed panel	
HINGE ADAPTER FOR 13 MM OVERLAY DOORS	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION	
	30	120	REF. 12016 - 17 MM HINGE ADAPTER / 14 mm thick adapter in anodized aluminium / on 10 mm overlay doors is mounted between the hinges ref. 2113/1911/2114/1912/2115/1913/2116/1914 and the fixed panel	
CLOTHES HOOK	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION	
	50	200	REF. 12017 - CLOTHES HOOK / single clothes hook in anodized aluminium / 2 countersunk Ø 5mm holes	
PANEL-TO-WALL CLAMP 10 MM	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION	
	25	100	REF. 12018 PANEL-TO-WALL CLAMP 10 MM / in anodized aluminium / 1 countersunk Ø 5,5 mm hole for attachment to the panel / 1 countersunk Ø 4 mm hole to mount the panel clamp to the wall	
PANEL-TO-WALL CLAMP 13 MM	QTÉ/ CARTON	QTÉ/BOX	DESCRIPTION	
	25	100	REF. 12019 PANEL-TO-WALL CLAMP 13 MM / in anodized aluminium / 1 countersunk Ø 5,5 mm hole for attachment to the panel / 1 countersunk Ø 4 mm hole to mount the panel clamp to the wall	



SERIE: PARTS AND ACCESSORIES IN ALUMINIUM BLACKLINE

- ONLY USE IN DRY ENVIRONMENTS -

ANGLE FIXTURE WITH TWO COUNTERSUNK HOLES	QTY/BOX	DESCRIPTION	
	60	REF. 12020 - ANGLE FIXTURE WITH TWO COUNTERSUNK HOLES / in black anodized aluminium for the attachment of the side partition to the wall / two countersunk holes Ø 6 mm	
ANGLE FIXTURE WITH ONE COUNTERSUNK HOLE AND 1 SLOT HOLE	QTY/BOX	DESCRIPTION	
	60	REF. 12021 - ANGLE FIXTURE WITH ONE COUNTERSUNK HOLE AND 1 SLOT HOLE / in black anodized aluminium for the attachment of the side partition to the wall / 1 countersunk hole Ø 6 mm / 1 slot hole	



STAINLESS STEEL

The CUBILOX stainless steel range is produced from high-quality stainless steel.

The inox line is a sleek design and from high quality. We strive for a high level of finishing.

The inox CUBILOX range comprises all the metalwork for various panel thicknesses 10 mm, 13 mm, 30 mm, and this for partitions with outward- or inward- opening doors, for full inlay doors (a door in line with the front wall) as well as rebated doors.




SERIE: PARTS AND ACCESSORIES IN INOX





Elegance

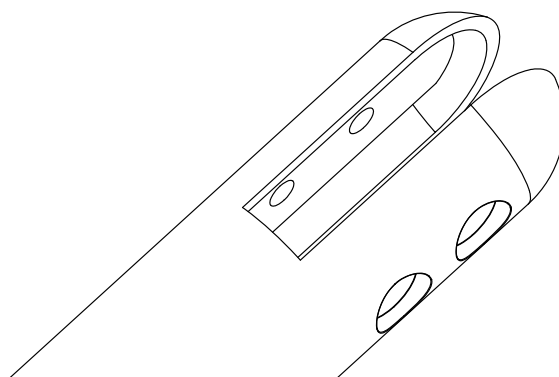
ELEGANCE - ADJUSTABLE FOOT 90 MM - 130 MM PANEEL 10 MM	QTY/BOX	QTY/CARTON	DESCRIPTION
	12	24	REF. 10675 - ELEGANCE - ADJUSTABLE FOOT 90 - 130 MM PANEEL 10 MM / in brushed 316 stainless steel for height under panel from 90 mm to 130 mm / suitable for panel thickness of 10 mm / 30 mm tube diameter - 35 mm panel holder diameter / base in nylon fibreglass reinforced with 4 holes of 7 mm for attachment to the floor and with M12 threaded rod for height adjustment / the height of the panel holder is adjusted using a 32 mm flat wrench, our ref. 3377 / a lock nut that is tightened with a 20 mm wrench ensures panel holder stability / a cover cap in 316 stainless steel with an outer diameter of 72 mm at the base allows easy access to the screws / the cover cap can be pushed up to allow access when tightening the foot / 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel
ELEGANCE - ADJUSTABLE FOOT 130 - 170 MM PANEEL 10 MM	QTY/BOX	QTY/CARTON	DESCRIPTION
	12	24	REF. 10676 - ELEGANCE - ADJUSTABLE FOOT 130 - 170 MM PANEEL 10 MM / in brushed 316 stainless steel for height under panel from 130 mm to 170 mm / suitable for panel thickness of 10 mm / 30 mm tube diameter - 35 mm panel holder diameter / base in nylon fibreglass reinforced with 4 holes of 7 mm for attachment to the floor and with M12 threaded rod for height adjustment / the height of the panel holder is adjusted using a 32 mm flat wrench, our ref. 3377 / a lock nut that is tightened with a 20 mm wrench ensures panel holder stability / a cover cap in 316 stainless steel with an outer diameter of 72 mm at the base allows easy access to the screws / the cover cap can be pushed up to allow access when tightening the foot / 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel
ELEGANCE - ADJUSTABLE FOOT 90 - 130 MM PANEEL 13 MM	QTY/BOX	QTY/CARTON	DESCRIPTION
	12	24	REF. 10677 - ELEGANCE - ADJUSTABLE FOOT 90 - 130 MM PANEEL 13 MM / in brushed 316 stainless steel for height under panel from 90 mm to 130 mm / suitable for panel thickness of 13 mm / 30 mm tube diameter - 35 mm panel holder diameter / base in nylon fibreglass reinforced with 4 holes of 7 mm for attachment to the floor and with M12 threaded rod for height adjustment / the height of the panel holder is adjusted using a 32 mm flat wrench, our ref. 3377 / a lock nut that is tightened with a 20 mm wrench ensures panel holder stability / a cover cap in 316 stainless steel with an outer diameter of 72 mm at the base allows easy access to the screws / the cover cap can be pushed up to allow access when tightening the foot / 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel
ELEGANCE - ADJUSTABLE FOOT 130 - 170 MM PANEEL 13 MM	QTY/BOX	QTY/CARTON	DESCRIPTION
	12	24	REF. 10678 - ELEGANCE - ADJUSTABLE FOOT 130 - 170 MM PANEEL 13 MM / in brushed 316 stainless steel for height under panel from 130 mm to 170 mm / suitable for panel thickness of 13 mm / 30 mm tube diameter - 35 mm panel holder diameter / base in nylon fibreglass reinforced with 4 holes of 7 mm for attachment to the floor and with M12 threaded rod for height adjustment / the height of the panel holder is adjusted using a 32 mm flat wrench, our ref. 3377 / a lock nut that is tightened with a 20 mm wrench ensures panel holder stability / a cover cap in 316 stainless steel with an outer diameter of 72 mm at the base allows easy access to the screws / the cover cap can be pushed up to allow access when tightening the foot / 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel





ADJUSTABLE FOOT 90 - 130 MM PANEL 10 MM	QTY/BOX	QTY/CARTON	DESCRIPTION
	12	24	REF. 3867 - ADJUSTABLE FOOT 90 - 130 MM PANEL 10 MM / in brushed 316 stainless steel for height under panel from 90 mm to 130 mm / suitable for panel thickness of 10 mm / 30 mm tube diameter - 35 mm panel holder diameter / base in nylon fibreglass reinforced with 4 holes of 7 mm for attachment to the floor and with M12 threaded rod for height adjustment / the height of the panel holder is adjusted using a 32 mm flat wrench, our ref. 3377 / a lock nut that is tightened with a 20 mm wrench ensures panel holder stability / a cover cap in 316 stainless steel with an outer diameter of 72 mm at the base allows easy access to the screws / the cover cap can be pushed up to allow access when tightening the foot / 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel
ADJUSTABLE FOOT 140 - 170 MM PANEL 13 MM	QTY/BOX	QTY/CARTON	DESCRIPTION
	12	24	REF. 3866 - ADJUSTABLE FOOT 140 - 170 MM PANEL 13 MM / in brushed 316 stainless steel for height under panel from 140 mm to 170 mm / suitable for panel thickness of 13 mm / 30 mm tube diameter - 35 mm panel holder diameter / base in nylon fibreglass reinforced with 4 holes of 7 mm for attachment to the floor and with M12 threaded rod for height adjustment / the height of the panel holder is adjusted using a 32 mm flat wrench, our ref. 3377 / a lock nut that is tightened with a 20 mm wrench ensures panel holder stability / a cover cap in 316 stainless steel with an outer diameter of 72 mm at the base allows easy access to the screws / the cover cap can be pushed up to allow access when tightening the foot / 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel
ADJUSTABLE FOOT 90 - 130 MM PANEL 13 MM	QTY/BOX	QTY/CARTON	DESCRIPTION
	12	24	REF. 3865 - ADJUSTABLE FOOT 90 - 130 MM PANEL 13 MM / in brushed 316 stainless steel for height under panel from 90 mm to 130 mm / suitable for panel thickness of 13 mm / 30 mm tube diameter - 35 mm panel holder diameter / base in nylon fibreglass reinforced with 4 holes of 7 mm for attachment to the floor and with M12 threaded rod for height adjustment / the height of the panel holder is adjusted using a 32 mm flat wrench, our ref. 3377 / a lock nut that is tightened with a 20 mm wrench ensures panel holder stability / a cover cap in 316 stainless steel with an outer diameter of 72 mm at the base allows easy access to the screws / the cover cap can be pushed up to allow access when tightening the foot / 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel
SET DOORKNOBS 30 MM	QTY/BOX	QTY/CARTON	DESCRIPTION
	20	40	REF. 3851 - SET DOORKNOBS 30 MM / set of 2 30-mm diameter doorknobs in brushed 316 stainless steel / suitable for panel thicknesses of 10 mm and 13 mm / 1 doorknob is equipped with an M8 stainless steel threaded rod / the other doorknob has an inner thread of M8 and is locked laterally using a 3 mm Allen key

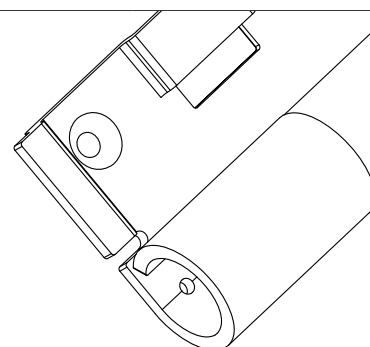


SERIE: PARTS AND ACCESSORIES IN INOX

DOOR LOCK FOR 13 MM PANEL - in line	QTY/BOX	QTY/CARTON	DESCRIPTION
	10	60	REF. 10300 - DOOR LOCK FOR 13 MM PANEL - IN LINE / twist lock in brushed 316 stainless steel with 'free' indication in white and 'occupied' indication in red / suitable for panels fitted in-line with a thickness of 13 mm / 55 mm outer diameter / 360° rotational angle with soft stop every 90° / unlocking from the outside using an 8 mm square socket key ref. 1134 / supplied with 2 M4 x 30 mm stainless steel cross-recessed countersunk screws
DOOR LOCK FOR 13 MM OVERLAY DOOR	QTY/BOX	QTY/CARTON	DESCRIPTION
	8	48	REF. 10301 - DOOR LOCK FOR 13 MM PANEL - OVERLAY DOOR / twist lock in brushed 316 stainless steel with 'free' indication in white and 'occupied' indication in red / suitable for overlay doors with a thickness of 13 mm thanks to an integrated 17 mm intermediate piece / 55 mm outer diameter / 360° rotational angle with soft stop every 90° / unlocking from the outside using an 8 mm square socket key ref. 1134 / supplied with 2 M4 x 50 mm stainless steel cross-recessed countersunk screws
DOOR LOCK FOR 10 MM PANEL - in line	QTY/BOX	QTY/CARTON	DESCRIPTION
	10	60	REF. 10302 - DOOR LOCK FOR 10 MM PANEL - IN LINE / twist lock in brushed stainless steel with 'free' indication in white and 'occupied' indication in red / suitable for panels fitted in-line with a thickness of 10 mm / 55 mm outer diameter / 360° rotational angle with soft stop every 90° / unlocking from the outside using an 8 mm square socket key ref. 1134 / supplied with 2 M4 x 30 mm stainless steel cross-recessed countersunk screws
DOOR LOCK FOR 10 MM OVERLAY DOOR	QTY/BOX	QTY/CARTON	DESCRIPTION
	10	60	REF. 10303 - DOOR LOCK FOR 10 MM PANEL - OVERLAY DOOR / twist lock in brushed stainless steel with 'free' indication in white and 'occupied' indication in red / suitable for overlay doors with a thickness of 10 mm thanks to an integrated 14 mm intermediate piece / 55 mm outer diameter / 360° rotational angle with soft stop every 90° / unlocking from the outside using an 8 mm square socket key ref. 1134 / supplied with 2 M4 x 45 mm stainless steel cross-recessed countersunk screws






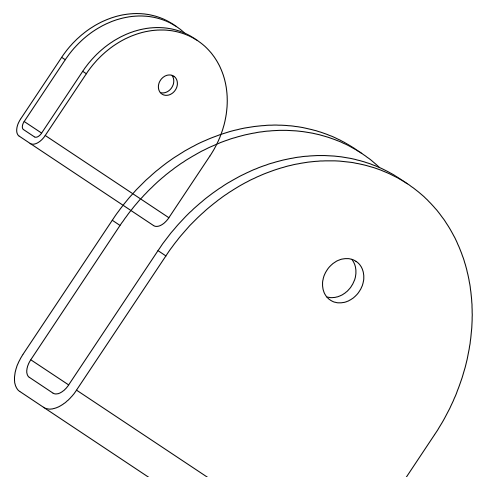
RIGHT HINGE WITH COVER CAPS	QTY/BOX	QTY/CARTON	DESCRIPTION
	30	90	REF. 3856 - RIGHT HINGE WITH COVER CAPS / in brushed 316 stainless steel / mounted on the right side of the door / with grease lubricated Ø 12 mm inner pin in stainless steel / a nylon sleeve is mounted over the pin between the 2 hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / the screws (not included) are invisible after installation of the cover caps / suitable for panels fitted in-line with a thickness of 10 mm and 13 mm / for use with 14 mm hinge adapter ref. 3860 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 3861 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge
LEFT HINGE WITH COVER CAPS	QTY/BOX	QTY/CARTON	DESCRIPTION
	30	90	REF. 3857 - LEFT HINGE WITH COVER CAPS / in brushed 316 stainless steel / mounted on the left side of the door / with grease lubricated Ø 12 mm inner pin in stainless steel / a nylon sleeve is mounted over the pin between the 2 hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / the screws (not included) are invisible after installation of the cover caps / suitable for panels fitted in-line with a thickness of 10 mm and 13 mm / for use with 14 mm hinge adapter ref. 3860 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 3861 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge
RIGHT SPRING HINGE WITH COVER CAPS	QTY/BOX	QTY/CARTON	DESCRIPTION
	15	90	REF. 3858 - RIGHT SPRING HINGE WITH COVER CAPS / in brushed 316 stainless steel / mounted on the right side of the door / with grease lubricated hollow brass Ø 12 mm inner pin / stainless steel spring in the hollow pin / the tension of the spring is adjusted at the upper side of the hinge with the help of a flat screwdriver and locked to the side of the hinge using a 2.5 mm Allen key / the spring may be extended to 180° with a closed door / a nylon sleeve is mounted over the pin between the 2 hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / the screws (not included) are invisible after installation of the cover caps / suitable for panels fitted in-line with a thickness of 10 mm and 13 mm / for use with 14 mm hinge adapter ref. 3860 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 3861 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge
LEFT SPRING HINGE WITH COVER CAPS	QTY/BOX	QTY/CARTON	DESCRIPTION
	15	90	REF. 3859 - LEFT SPRING HINGE WITH COVER CAPS / in brushed 316 stainless steel / mounted on the left side of the door / with grease lubricated hollow brass Ø 12 mm inner pin / stainless steel spring in the hollow pin / the tension of the spring is adjusted at the upper side of the hinge with the help of a flat screwdriver and locked to the side of the hinge using a 2.5 mm Allen key / the spring may be extended to 180° with a closed door / a nylon sleeve is mounted over the pin between the 2 hinge parts / 2 countersunk Ø 5 mm mounting holes on each side of the hinge / the screws (not included) are invisible after installation of the cover caps / suitable for panels fitted in-line with a thickness of 10 mm and 13 mm / for use with 14 mm hinge adapter ref. 3860 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 3861 for 13 mm thick overlay door / the maximum load capacity is 40 kg per hinge



SERIE: PARTS AND ACCESSORIES IN INOX


HINGE ADAPTER FOR 10 MM OVERLAY DOORS	QTY/BOX	QTY/CARTON	DESCRIPTION
 	30	120	REF. 3860 - HINGE ADAPTER FOR 10 MM OVERLAY DOORS / in black nylon, 14 mm thick / on 10 mm overlay doors is mounted between the hinges and the fixed panel
HINGE ADAPTER FOR 13 MM OVERLAY DOORS	QTY/BOX	QTY/CARTON	DESCRIPTION
 	30	120	REF. 3861 - HINGE ADAPTER FOR 13 MM OVERLAY DOORS / in black nylon, 17 mm thick / on 13 mm overlay doors is mounted between the hinges and the fixed panel
SMALL CLOTHES HOOK	QTY/BOX	QTY/CARTON	DESCRIPTION
	50	200	REF. 3862 - SMALL CLOTHES HOOK / in brushed 316 stainless steel - 3 mm / width 16 mm - height 50 mm - hook depth 18 mm / 2 countersunk Ø 5.5 mm holes
LARGE CLOTHES HOOK	QTY/BOX	QTY/CARTON	DESCRIPTION
	50	200	REF. 3863 - LARGE CLOTHES HOOK / in brushed 316 stainless steel - 3 mm / width 20 mm - height 60 mm - hook depth 20 mm / 2 countersunk Ø 5.5 mm holes

ANGLE FIXTURE WITH 2 ROUND HOLES	QTY/BAG	QTY/CARTON	DESCRIPTION
	20	120	REF. 3864 - ANGLE FIXTURE with 2 round holes / in brushed 316 stainless steel - 2 mm / walls are each equipped with a 6 mm hole for attachment to the panel
10 MM PANEL-TO-WALL CLAMP	QTY/BOX	QTY/CARTON	DESCRIPTION
	25	100	REF. 3868 - 10 MM PANEL-TO-WALL CLAMP / in brushed 316 stainless steel - 2 mm / one wall mount is equipped with a 6 mm hole for attachment to panel / hole for wall mounting has a diameter of 6 mm
13 MM PANEL-TO-WALL CLAMP	QTY/BOX	QTY/CARTON	DESCRIPTION
	25	100	REF. 3869 - 13 MM PANEL-TO-WALL CLAMP / in brushed 316 stainless steel - 2 mm / one wall mount is equipped with a 6 mm hole for attachment to panel / hole for wall mounting has a diameter of 6 mm



ACCESSORIES FOR NYLON | ALUMINIUM | INOX

SOCKET	QTY/BOX	ART.	DESCRIPTION
	2000	2941	REF. 2941 - SOCKET IN SS AISI 316 M5 DIAM. 7,8 MM X L 9 MM / socket in lubricated stainless steel 316, M5 Ø 7,8 mm x 9,00 mm
KEY FOR DOOR PANEL	QTY/BOX	ART.	DESCRIPTION
	50	3097	REF. 3097 - KEY FOR REINFORCED PANEL HOLDER for ref.. 3865/ 3866/ 3867
KEY FOR DOOR PANEL	QTY/BOX	ART.	DESCRIPTION
	50	3377	REF. 3377 - KEY FOR REINFORCED PANEL HOLDER for ref.. 3865/ 3866/ 3867
KEY FOR DOOR LOCK	QTY/BOX	ART.	DESCRIPTION
	50	1134	REF. 1134 - 8 MM SQUARE SOCKET KEY FOR DOOR LOCK / chromed steel socket key for unlocking door locks with 8mm square spindle

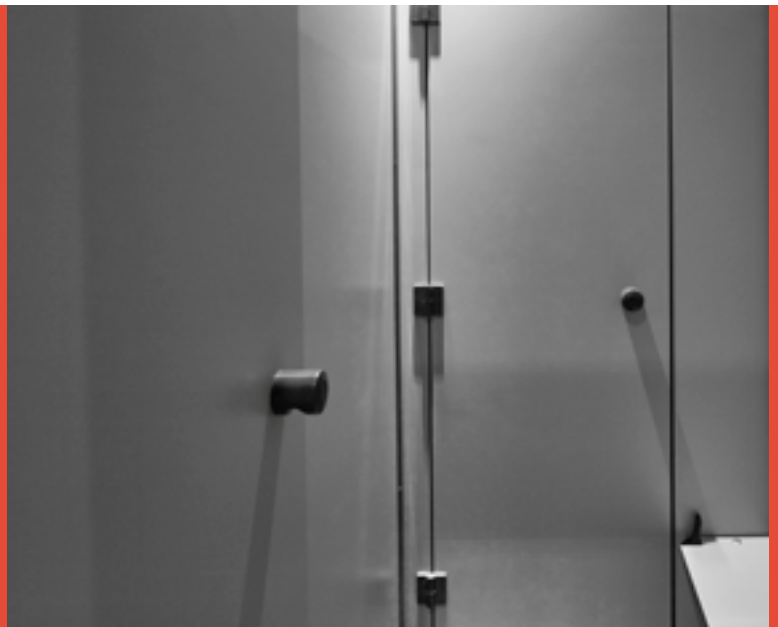



**CONTACT US FOR
MORE CUBICARE**



CUBILOX a division of



Barrage 105
8793 St. Eloois Vijve
T +32 (0)56 32 74 60
info@cubilox.be
www.cubilox.be

NSE NV is an SME which sets great store by good service and flexibility. Contact us for a visit, a catalogue, a quotation or to obtain some product samples. We will get back to you as soon as possible.

www.nsenv.be